

## Pressure Seal Valve

A Stronger and Tighter valve with less weight, bulk and minimum maintenance, especially for high temperature, high pressure, services encountered in nuclear and fossil fuel power plants.

### Cast Alloy Steel A217 Grade C12A Neway Gate, Globe & Check valves for servicing high pressure and high temperature power plant

To cater for the tendency of increasing power plant temperature and pressure to improve efficiencies and meet other high temperature industries, Neway had successfully developed cast alloy steel A217 Gr. C12A, the alloy exhibit excellent high-temperature properties based on the formation of a particular microstructure containing submicroscopic carbides, and the alloy is also much more resistant to thermal fatigue than the austenitic stainless steel because of its lower thermal expansion rating and higher thermal conductivity. Table 1 below show the allowable stresses (MPa) of several ASTM materials widely used in high temperature industries, and chemical compositions of C12A are shown in below table 2:

Table 2

Grade	Basic element											
	C	Si	Mn	S	P	Cr	V	N	Nb	Mo	Ni	AL
ASTM A217 C12A	0.08-0.12	0.20-0.50	0.30-0.60	≤ 0.01	≤ 0.03	8.00-9.50	0.18-0.25	0.03-0.07	0.06-0.10	0.85-1.05	≤ 0.4	≤ 0.04

To realize the required high temperature properties, in addition to the acceptable chemical composition and room temperature mechanical properties, a number of metallurgical issues must be properly

Table 1

Unit: Mpa

Temperature		Castings			Forgings		
°C	°F	WC9	C12	C12A	F22	F9	F91
38	100	138	177.2	146.9	147.6	167.5	167.5
260	500	133	169.6	133	141.3	160.7	166.2
343	650	131.7	164.8	126.9	139.3	155.8	161.3
482	900	109	113	111	108.9	113	131.7
538	1050	35.2	34.5	78.6	35.2	34.5	96.5
593	1100	22	22.8	60.7	22	22.8	71

Table 1: ASME code section II allowable stresses.

Note: Alloy C12A or F91 provide much higher allowable stresses in the temperature range from 482-593°C (900-1100°F)

executed including deoxidation practices, heat-treatment, welding process and PWHT(post welding heat treatment). Then, the special microstructure can be formed, Below Fig.1, 2 & 3 show the accepted microstructures:



Figure 1: Acceptable microstructure of castings (100X)<sup>(1)</sup>



Figure 2: Acceptable microstructure after welding. (100X)<sup>(1)</sup>



Figure 3: Acceptable microstructure in hot affected zone. (100X)<sup>(1)</sup>

### 1. Deoxidization


To remove dissolved oxygen prior to pouring castings, small quantities of deoxidizers with high affinity for oxygen are added into melted metal so as to combine with the oxygen to form solid oxygen inclusion particles. The most common deoxidizers are manganese, silicon and aluminum. Only the proper processing, of course which is very difficult, can assure the final acceptable proportion microstructure, refer to Fig.1, and the high temperature creep strength.

### 2. Heat treatment

This processing is also one of the critical procedures to ensure the proper microstructure. In order to assure the high temperature properties, we perform strict heat treatment process, including heating time and heat preservation time.

### 3. Welding & Post-weld heat treatment (PWHT)

To achieve the proper creep resistance and toughness for the high chrome alloy, we make special weld process & PWHT process, including pre-heating temperature control & welding filler materials, especially PWHT, all processes are controlled precisely to form martensite in the weld and heat affected zone (HAZ). Figure 2 & 3 show the acceptable microstructure in weld & HAZ.

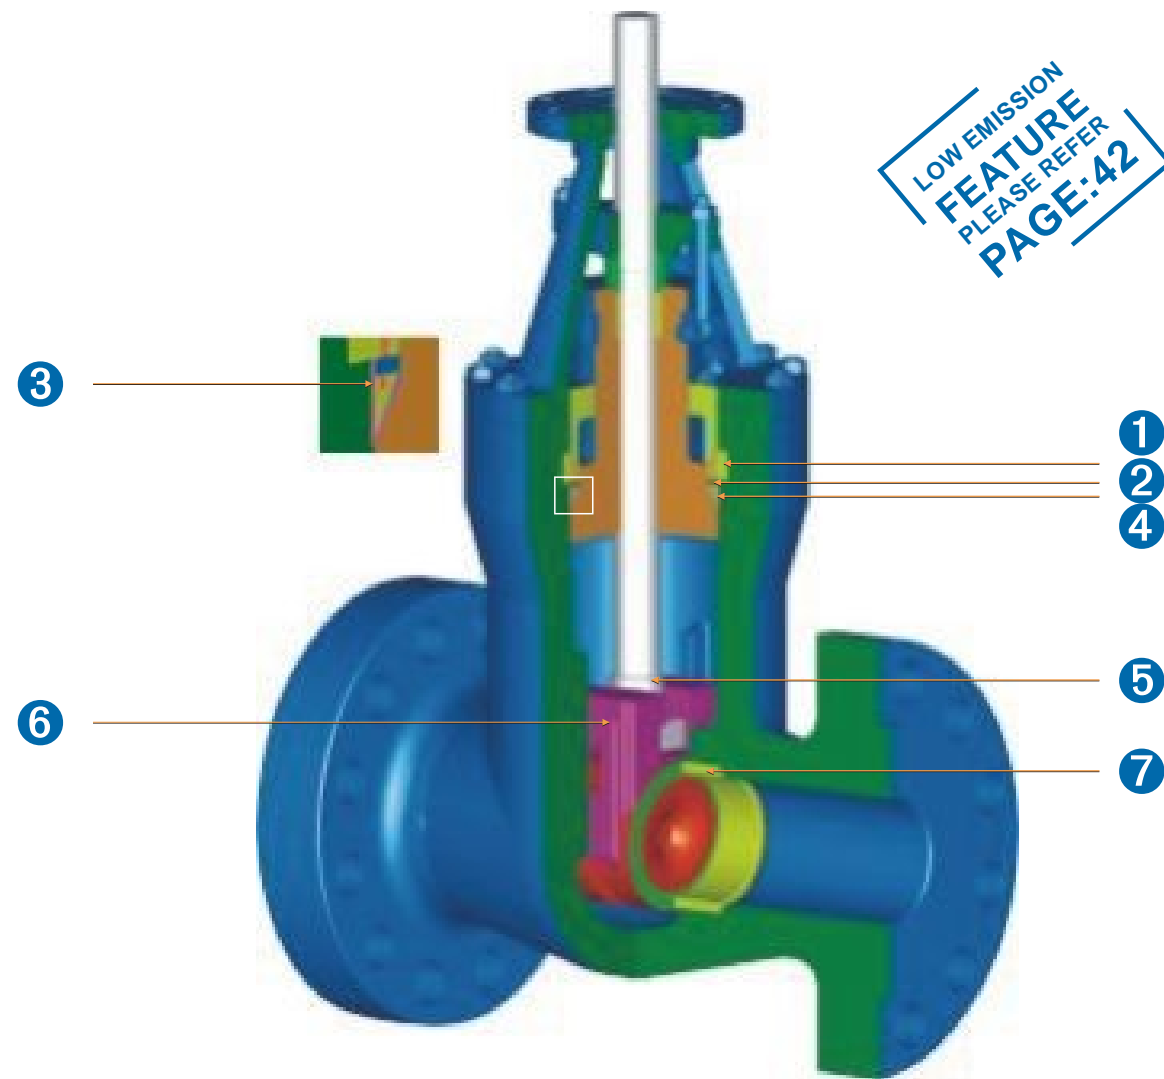


- 1 Segmental thrust ring absorb all the thrust applied by the internal pressure
- 2 Thrust ring to provide bearing surface and prevent deformation of the gaskets
- 3 Stainless steel inlay to ensure soundness and corrosion-resistance in the vital body sealing zone for carbon and alloy steel valves
- 4 Soft steel gasket seal to provide large contact area for perfect sealing
- 5 Anti blow-out stem design with collar
- 6 Flexible wedge to compensate for seat face distortion and body deformation due to pipe stress
- 7 Seat ring with satellite 6 overlay is standard design

Part	Standard	Stainless Steel	High temperature Service		
			ASTM A217-WC6	ASTM A217-WC9	ASTM A217-C12A
BODY	ASTM A216-WCB	ASTM A351-CF8M	ASTM A217-WC6	ASTM A217-WC9	ASTM A217-C12A
BONNET	ASTM A105	ASTM A182-F316	ASTM A182-F11	ASTM A182-F22	ASTM A217-C12A
WEDGE	ASTM A216-WCB/ER410 & ASTM A217-CA15	ASTM A351-CF8M/STL.OVERLAY	ASTM A217-WC6/ER410 & ASTM A217-CA15	ASTM A217-WC9/ER410 & ASTM A217-CA15	ASTM A217-C12A/ER410
STEM NUT	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2
GLAND FLANGE	ASTM A216-WCB	ASTM A351-CF8	ASTM A216-WCB	ASTM A216-WCB	ASTM A216-WCB
HANDWHEEL	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON
SEAT RING	ASTM A105/STL.OVERLAY	ASTM A182-F316/STL.OVERLAY	ASTM A182-F11/STL.OVERLAY	ASTM A182-F22/STL.OVERLAY	ASTM A182-F6a/STL.OVERLAY
STEM	ASTM A182-F6a	ASTM A182-F316	ASTM A182-F6a	ASTM A182-F6a	ASTM A182-F6a
BONNET SEAL RING	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F316L(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)
GLAND	ASTM A276-420	ASTM A276-316	ASTM A276-420	ASTM A276-420	ASTM A276-420
RETAINING NUT FOR STEM NUT	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	CARBON STEEL
YOKE	ASTM A216-WCB	ASTM A351-CF8	ASTM A216-WCB& ASTM A217-WC6	ASTM A216-WCB& ASTM A217-WC6	ASTM A216-WCB
PACKING	GRAPHITE	GRAPHITE	GRAPHITE	GRAPHITE	GRAPHITE
BONNET SEPARATE RING	CARBON STEEL	ASTM A276-420	ANSI 4140	ANSI 4140	ANSI 4140
CLIPPING RING	ASTM A216-WCB	ASTM A351-CF8	ASTM A217-WC6	ASTM A217-WC6	ASTM A276-420
HANDWHEEL NUT	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	CARBON STEEL
BONNET STUD	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
BONNET NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
YOKE STUD	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
YOKE NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
EYE BOLT	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
GLAND NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
BONNET THRUST RING	CARBON STEEL	ASTM A276-420	AISI 4140	AISI 4140	ANSI 4140
SUPPORTING COVER	ASTM A105	ASTM A276-420	AISI 4140	AISI 4140	ANSI 4140
CLIPPING RING BOLT	CARBON STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
RIVET	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	STAINLESS STEEL
NAME PLATE	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL

Notes: Above materials are general, when ordered, Please contact NEWAY Sales or technical team to confirm the details.



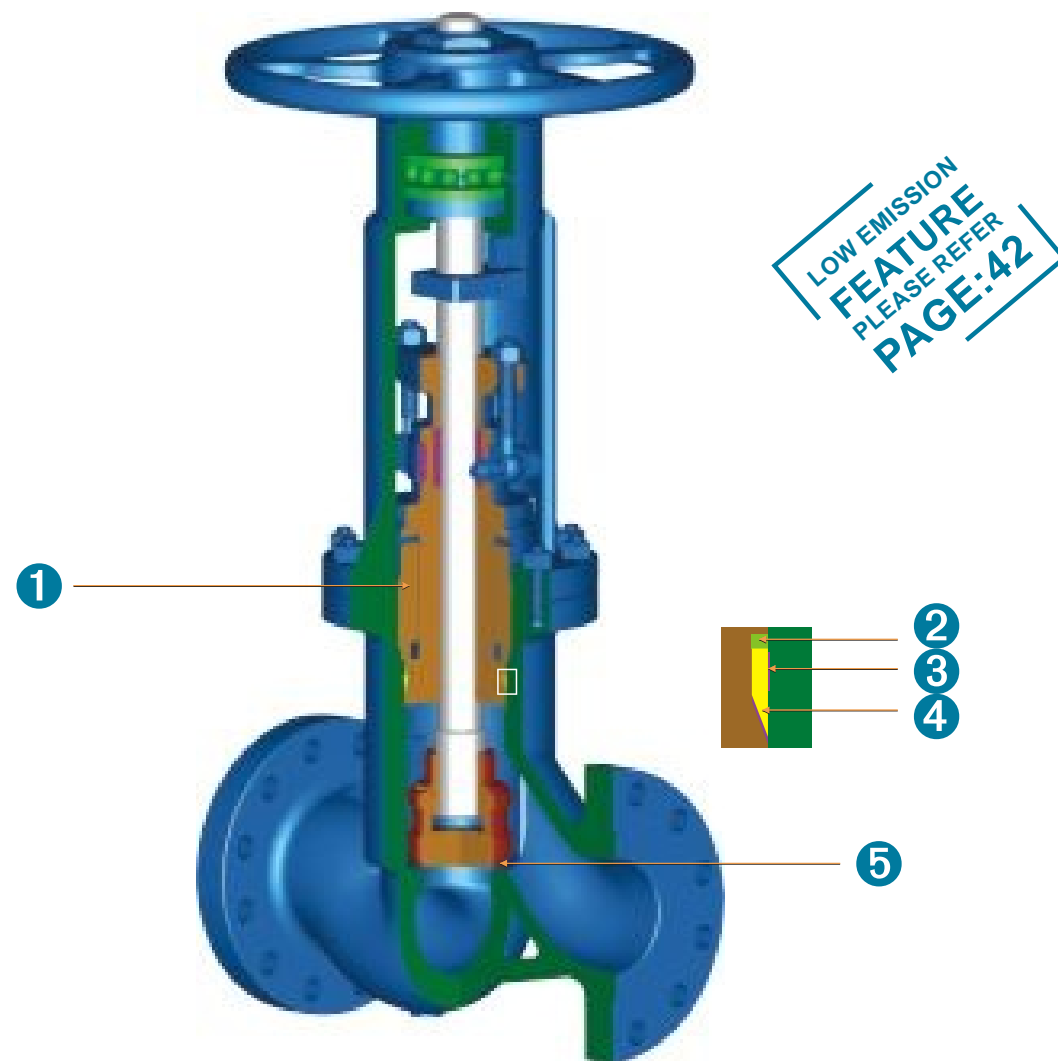

- 1 Thrust ring nut absorb all the thrust applied by the internal pressure.
- 2 Thrust ring to provide bearing surface and prevent deformation of the gaskets.
- 3 Stainless steel inlay to ensure soundness and corrosion-resistance in the vital body sealing zone for carbon and alloy steel valves.
- 4 Soft steel gasket seal to provide large contact area for perfect sealing.
- 5 Seat face with satellite 6 is standard design.

Part	Standard	Stainless Steel	High temperature Service		
			ASTM A217-WC6/STL.OVERLAY	ASTM A217-WC9/STL.OVERLAY	ASTM A217-C12A/STL.OVERLAY
BODY	ASTM A216-WCB/STL.OVERLAY	ASTM A351-CF8M/STL.OVERLAY	ASTM A217-WC6/STL.OVERLAY	ASTM A217-WC9/STL.OVERLAY	ASTM A217-C12A/STL.OVERLAY
BONNET	ASTM A105	ASTM A182-F316	ASTM A182-F11	ASTM A182-F22	ASTM A217-C12A
DISC	ASTM A182-F6a & ASTM A105/ER410	ASTM A182-F316	ASTM A182-F6a & ASTM A182-F11/ER410	ASTM A182-F6a & ASTM A182-F22/ER410	ASTM A182-F6a
STEM NUT	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2	ASTM A439 D-2
GLAND FLANGE	ASTM A216-WCB	ASTM A351-CF8	ASTM A216-WCB	ASTM A216-WCB	ASTM A216-WCB
HANDWHEEL	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON
BONNET SEAL RING	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F316L(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)
STEM	ASTM A182-F6a	ASTM A182-F316	ASTM A182-F6a	ASTM A182-F6a	ASTM A182-F6a
RETAINING NUT FOR STEM NUT	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	CARBON STEEL
GLAND	ASTM A276-420	ASTM A182-F316	ASTM A276-420	ASTM A276-420	ASTM A276-420
HANDWHEEL NUT	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	CARBON STEEL
DISC NUT	ASTM A276-420	ASTM A182-F316	ASTM A276-420	ASTM A276-420	ASTM A276-420
STEM WASHER	ASTM A276-430	NO	ASTM A276-430	ASTM A276-430	ASTM A276-430
THRUST RING	CARBON STEEL	AITM A276-420	AISI 4140	AISI 4140	AISI 4140
PACKING	GRAPHITE	GRAPHITE	GRAPHITE	GRAPHITE	GRAPHITE
CLIPPING RING	ASTM A216-WCB	ASTM A351-CF8	ASTM A217-WC6	ASTM A217-WC6	ASTM A276-420
YOKE STUD	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
YOKE NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
EYE BOLT	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
GLAND NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
BONNET NUT 1	CARBON STEEL	ASTM A276-420	AISI 4140	AISI 4140	AISI 4140
CLIPPING RINGBOLT	CARBON STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
BONNET NUT 2	CARBON STEEL	ASTM A276-420	AISI 4140	AISI 4140	AISI 4140
ORIENTED BLOCK	CARBON STEEL	ASTM A276-420	CARBON STEEL	CARBON STEEL	CARBON STEEL
YOKE	ASTM A216-WCB	ASTM A351-CF8	ASTM A216-WCB& ASTM A217-WC6	ASTM A216-WCB& ASTM A217-WC6	ASTM A217-C12A
RIVET	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	STAINLESS STEEL
NAME PLATE	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL


Notes: Above materials are general, when ordered, Please contact NEWAY Sales or technical team to confirm the details.

**Class 600** Cast Carbon Steel Globe Valve

ASME B16.34,  
Pressure Seal, OS&Y,  
Rising Stem and Handwheel,  
Swivel Disc

Figure NO.:

GL6R-PS,WCB/NO.5  
GL6B-PS,WCB/NO.5  
GL6J-PS,WCB/NO.5

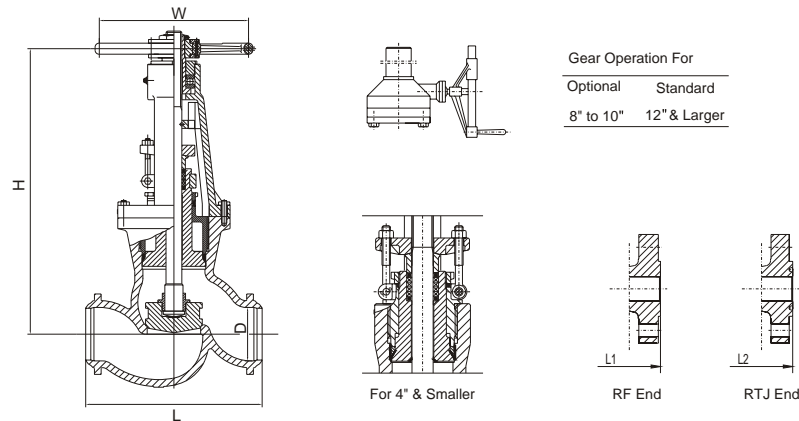


NPS	in	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"
DN	mm	50	65	80	100	125	150	200	250	300	350	400
L-L1 (RF-BW)	in	11.5	13	14	17	20	22	26	31	33	35	39
	mm	292	330	356	432	508	559	660	787	838	889	991
L2 (RTJ)	in	11.62	13.12	14.12	17.12	20.12	22.12	26.12	31.12	33.12	35.12	39.12
	mm	295	333	359	435	511	562	663	790	841	892	994
W	in	9.8	11.8	13.8	17.7	19.7	22	23.6	27.6	24	24	29.9
	mm	250	300	350	450	500	560	600	700	610	610	760
H	in	21.7	24.8	26.8	29.5	39.4	45.3	49.2	55.1	61	70.9	85
	mm	550	630	680	750	1000	1150	1250	1400	1550	1800	2160
WT(RF)	kg	45	55	85	135	190	305	620	1310	1900	2720	3150
WT(BW)	kg	35	45	60	95	150	230	540	1150	1720	2530	2900

**Class 1500** Cast Carbon Steel Globe Valve

ASME B16.34,  
Pressure Seal, OS&Y,  
Rising Stem and Handwheel,  
Swivel Disc

Figure NO.:

GL15R-PS,WCB/NO.5  
GL15B-PS,WCB/NO.5  
GL15J-PS,WCB/NO.5

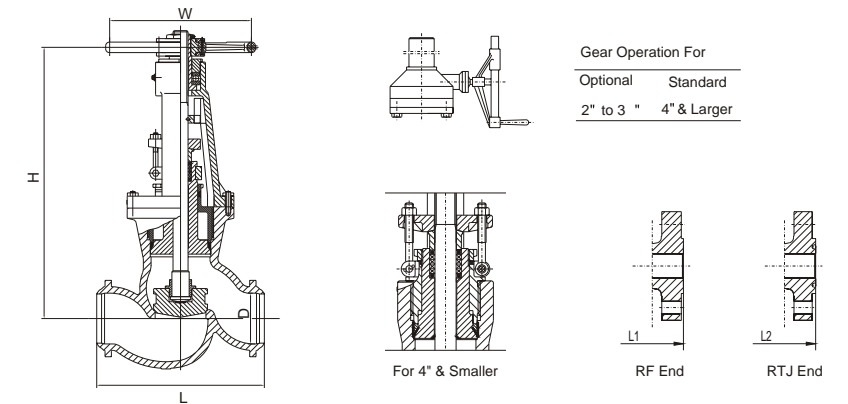


NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"	14"
DN	mm	50	65	80	100	150	200	250	300	350
L-L1 (RF-BW)	in	14.5	16.5	18.5	21.5	27.75	32.75	39	44.5	49.5
	mm	368	419	470	546	705	832	991	1130	1257
L2 (RTJ)	in	14.62	16.62	18.62	21.62	28	33.13	39.38	45.13	50.25
	mm	371	422	473	549	711	842	1000	1146	1276
W	in	14	14	20	22	24	24	39.38	39.38	47.25
	mm	350	350	500	560	610	610	1000	1000	1200
H	in	24.4	25.2	32.9	33.7	48.4	70.9	78.78	91	106
	mm	619	641	835	857	1230	1800	2000	2311	2692
WT(RF)	kg	84	116	143	236	918	1764	2680	3400	4300
WT(BW)	kg	58	62	128	168	781	1502	2280	2830	3600

**Class 900** Cast Carbon Steel Globe Valve

ASME B16.34,  
Pressure Seal, OS&Y,  
Rising Stem and Handwheel,  
Swivel Disc

Figure NO.:

GL9R-PS,WCB/NO.5  
GL9B-PS,WCB/NO.5  
GL9J-PS,WCB/NO.5

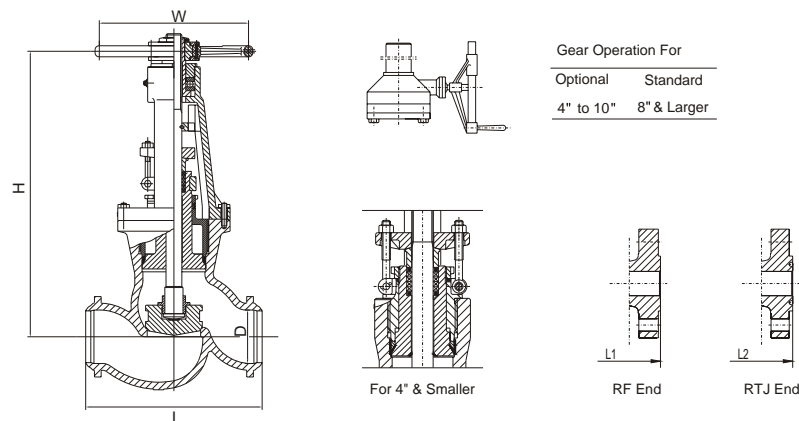


NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"	14"	16"
DN	mm	50	65	80	100	150	200	250	300	350	400
L-L1 (RF-BW)	in	14.5	16.5	15	18	24	29	33	38	40.50	44.50
	mm	368	419	381	457	610	737	838	965	1029	1130
L2 (RTJ)	in	14.62	16.62	15.12	18.12	24.12	29.12	33.13	38.13	40.88	44.88
	mm	371	422	384	460	613	740	841	968	1038	1140
W	in	14	14	18	20	24	24	24	39.38	39.38	47.25
	mm	350	350	450	500	610	610	610	1000	1000	1200
H	in	24.4	25.2	28.4	33.5	48.2	53.1	61	68.88	78.75	91
	mm	619	641	721	850	1225	1350	1550	1750	2000	2310
WT(RF)	kg	84	110	116	179	441	1050	1720	2300	3350	4000
WT(BW)	kg	58	74	84	137	378	945	1520	2050	3050	3600

**Class 2500** Cast Carbon Steel Globe Valve

ASME B16.34,  
Pressure Seal, OS&Y,  
Rising Stem and Handwheel,  
Swivel Disc


Figure NO.:

GL25R-PS,WCB/NO.5  
GL25B-PS,WCB/NO.5  
GL25J-PS,WCB/NO.5

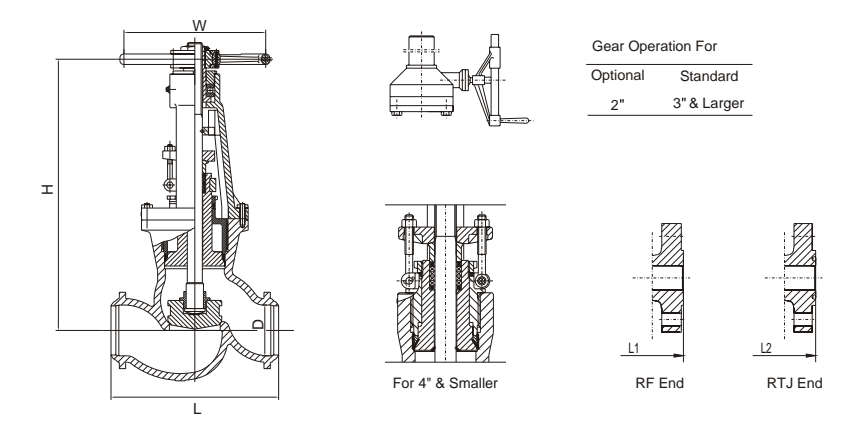

NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"
DN	mm	50	65	80	100	150	200	250	300
L-L1 (RF-BW)	in	17.75	20	22.75	26.5	36	40.25	50	56
	mm	451	508	578	673	914	1022	1270	1422
L2 (RTJ)	in	17.88	20.25	23	26.88	36.5	40.88	50.88	56.88
	mm	454	511	584	683	927	1038	1292	1445
W	in	16	20	22	24	24	24	39.38	39.38
	mm	400	500	560	610	610	610	1000	1000
H	in	24.3	30.7	31.5	51.2	53.9	85	100	106
	mm	616	781	800	1300	1370	2160	2540	2692
WT(RF)	kg	105	163	221	525	1313	2520	3300	4200
WT(BW)	kg	74	116	147	368	973	2100	2500	3300

LOW EMISSION  
FEATURE  
PLEASE REFER  
PAGE:42

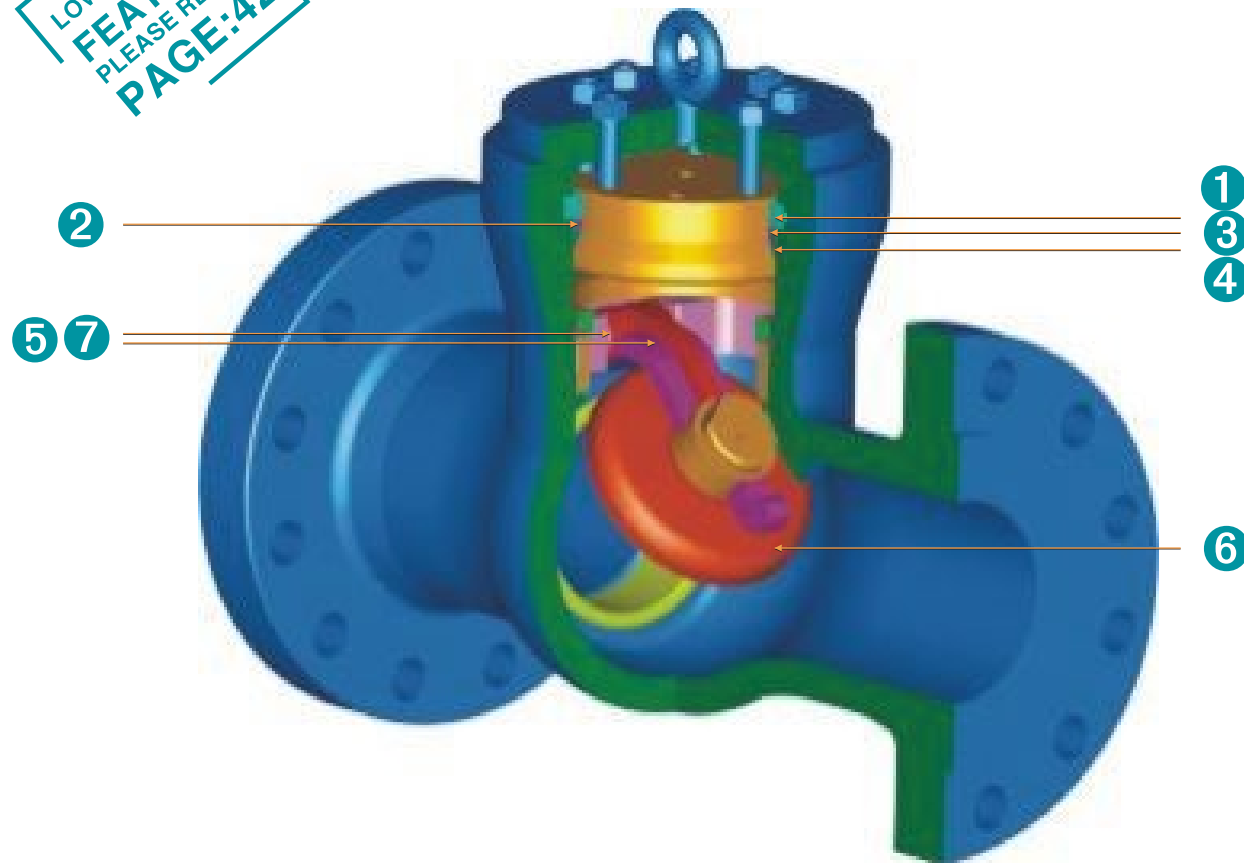

- 1 Segmental thrust ring absorb all the thrust applied by the internal pressure.
- 2 Thrust ring to provide bearing surface and prevent deformation of the gaskets.
- 3 Soft steel gasket seal to provide large contact area for perfect sealing.
- 4 Stainless steel inlay to ensure soundness and corrosion-resistance in the vital body sealing zone for carbon and alloy steel valves.
- 5 No external leakage hinge pin design.
- 6 Standard swing type disc only used in horizontal pipe lines handling liquids.
- 7 A hinge and hinge pin provided and mounted so as to permit full movement of the disc.

Part	Standard	Stainless Steel	High temperature Service		
			ASTM A217-WC6	ASTM A217-WC9	ASTM A217-C12A
BODY	ASTM A216-WCB	ASTM A351-CF8M	ASTM A217-WC6	ASTM A217-WC9	ASTM A217-C12A
COVER	ASTM A216-WCB(4"&Smaller ASTM A105)	ASTM A351-CF8M(4"&Smaller ASTM A182-F316)	ASTM A217-WC6(4"&Smaller ASTM A182-F11)	ASTM A217-WC9(4"&Smaller ASTM A182-F22)	ASTM A217-C12A(4"&Smaller ASTM A182-F91)
DISC	ASTM A217-CA15 &ASTM A216-WCB/ER410	ASTM A351-CF8M/STL.OVERLAY	ASTM A217-CA15 &ASTM A217-WC6/ER410	ASTM A217-CA15 &ASTM A217-WC9/ER410	ASTM A217-CA15
HINGE	ASTM A105	ASTM A351-CF8M	ASTM A217-WC6	ASTM A217-WC9	ASTM A217-C12A
HINGE PIN	ASTM A182-F6a	ASTM A276-316	ASTM A182-F6a	ASTM A182-F6a	ASTM A182-F6a
DISC NUT	ASTM A276-420	ASTM A276-316	ASTM A276-420	ASTM A276-420	ASTM A276-420
BONNET SEAL RING	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F316L(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)	ASTM A182-F304(4"&Smaller GRAPHITE)
HOOK SCREW	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	CARBON STEEL
COVER STUD	ASTM A193-B7	ASTM A193-B8	ASTM A193-B16	ASTM A193-B16	ASTM A193-B16
COVER NUT	ASTM A194-2H	ASTM A194-8	ASTM A194-4	ASTM A194-4	ASTM A194-4
SEAT RING	ASTM A105/STL.OVERLAY	ASTM A182-F316/STL.OVERLAY	ASTM A182-F11/STL.OVERLAY	ASTM A182-F22/STL.OVERLAY	ASTM A182-F6a/STL.OVERLAY
SEPARATE RING COVER	CARBON STEEL	ASTM A276-420	AISI 4140	AISI 4140	AISI 4140
THRUST RING COVER	CARBON STEEL	ASTM A276-420	AISI 4140	AISI 4140	AISI 4140
SUPPORTING COVER	ASTM A105	ASTM A276-420	AISI 4140	AISI 4140	AISI 4140
STOP RING	ASTM A276-420	ASTM A276-316	ASTM A276-420	ASTM A276-420	ASTM A276-420
YOKE	ASTM A216-WCB	ASTM A276-316	ASTM A216-WCB& ASTM A217-WC6	ASTM A216-WCB& ASTM A217-WC6	ASTM A217-C12A
SEPARATE RING FOR STOP RING	ASTM A276-420	ASTM A276-316	ASTM A276-420	ASTM A276-420	ASTM A276-420
SPLIT PIN	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
STOP RING SCREW	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
RIVET	CARBON STEEL	STAINLESS STEEL	CARBON STEEL	CARBON STEEL	STAINLESS STEEL
NAME PLATE	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL


Notes: Above materials are general, when ordered, Please contact NEWAY Sales or technical team to confirm the details.

**Class 600** Cast Carbon Steel Check Valve

ASME B16.34,  
Pressure Seal, Swing Type Disc

Figure NO.:

S6R-PS,WCB/NO.5  
S6B-PS,WCB/NO.5  
S6J-PS,WCB/NO.5

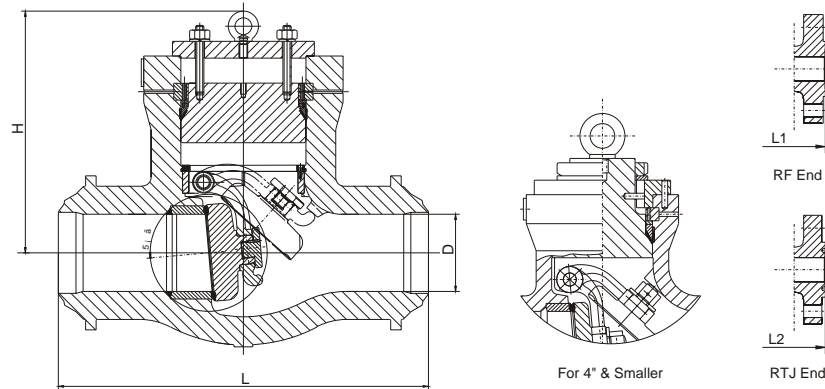


NPS	in	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	26"	28"	30"
DN	mm	50	65	80	100	125	150	200	250	300	350	400	450	500	600	650	700	750
L (RF-BW)	in	11.5	13	14	17	20	22	26	31	33	35	39	43	47	55	57	63	65
	mm	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	1448	1600	1651
L2 (RTJ)	in	11.62	13.12	14.12	17.12	20.12	22.12	26.12	31.12	33.12	35.12	39.12	43.13	47.25	55.38	57.5	63.5	65.5
	mm	295	333	359	435	511	562	663	790	841	892	994	1095	1200	1407	1461	1613	1664
H	in	9.5	10.4	10.6	12.5	15.7	15.7	23.1	23.9	27.4	29.5	28.7	28.75	32.25	37.38	39.38	43.25	47.25
	mm	241	264	270	318	400	400	587	606	695	749	730	730	819	949	1000	1099	1200
WT(RF)	kg	27	35	45	85	135	190	350	500	670	880	1150	1480	1880	2600	3100	3500	4000
WT(BW)	kg	18	25	32	55	85	130	260	370	490	660	850	1100	1490	2040	2500	2800	3150

**Class 1500** Cast Carbon Steel Check Valve

ASME B16.34,  
Pressure Seal, Swing Type Disc

Figure NO.:

S15R-PS,WCB/NO.5  
S15B-PS,WCB/NO.5  
S15J-PS,WCB/NO.5

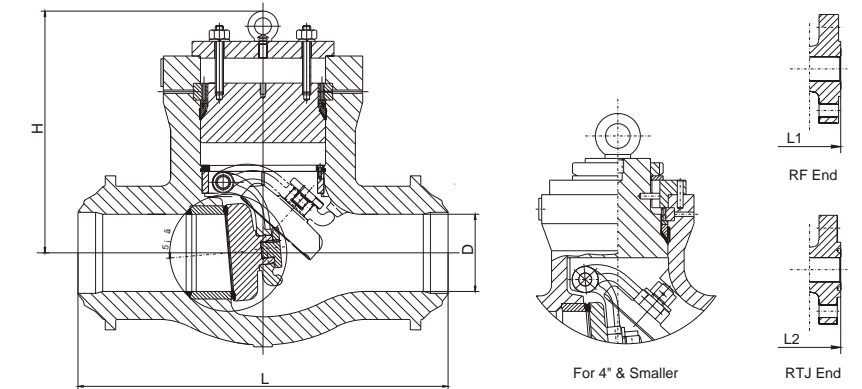


NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
DN	mm	50	65	80	100	150	200	250	300	350	400	450	500	600
L (BW)	in	8.5	10	12	16	22	28	34	39	42	47	60.5	65.5	76.5
	mm	216	254	305	406	559	711	864	991	1067	1194	1537	1664	1943
L1 (RF)	in	14.5	16.5	18.5	21.5	27.8	32.8	39	44.5	49.5	54.4	60.5	65.5	76.5
	mm	368	419	470	546	705	832	991	1130	1257	1384	1537	1664	1943
L2 (RTJ)	in	14.6	16.6	18.6	21.6	28	33.1	39.4	45.1	50.3	55.4	61.38	66.38	77.63
	mm	371	422	473	549	711	842	1000	1146	1276	1407	1559	1686	1972
H	in	9.5	10.4	10.8	12.5	16.6	18.9	23.3	25.4	28	29.5	34.63	37.38	43.25
	mm	241	264	274	318	422	479	591	645	711	749	880	949	1099
WT(RF)	kg	42	58	105	147	360	641	1103	1628	2205	2730	3300	4200	6000
WT(BW)	kg	21	34	42	74	233	504	777	1155	1481	1680	2100	2600	3500

**Class 900** Cast Carbon Steel Check Valve

ASME B16.34,  
Pressure Seal, Swing Type Disc

Figure NO.:

S9R-PS,WCB/NO.5  
S9B-PS,WCB/NO.5  
S9J-PS,WCB/NO.5

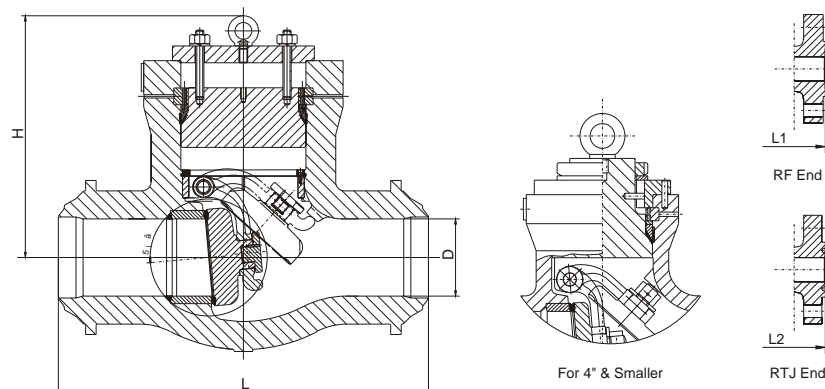


NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	26"	28"	30"
DN	mm	50	65	80	100	150	200	250	300	350	400	450	500	600	650	700	750
L (BW)	in	8.5	10	12	14	20	26	31	36	39	43	48	52	61	63	67	71
	mm	216	254	305	356	508	660	787	914	991	1092	1219	1321	1549	1600	1702	1803
L1 (RF)	in	14.5	16.5	15	18	24	29	33	38	40.5	44.5	48	52	61	65	69	73
	mm	368	419	381	457	610	737	838	965	1029	1130	1219	1321	1549	1651	1753	1854
L2 (RTJ)	in	14.6	16.1	15.1	18.1	24.1	29.1	33.1	38.1	40.9	44.9	48.5	52.5	61.75	65.88	69.88	73.88
	mm	371	422	384	460	613	740	841	968	1038	1140	1232	1333	1568	1673	1775	1876
H	in	9.5	10.4	10.6	12.5	15.7	23.1	23.9	27.4	29.5	28.7	33.50	34	37.75	39.38	45.25	55.13
	mm	241	264	270	318	400	587	606	695	749	730	851	864	959	1000	1149	1400
WT(RF)	kg	42	55	58	110	242	599	893	1365	1628	1733	2300	3000	4100	4600	5200	6000
WT(BW)	kg	21	32	34	68	168	462	725	1071	1281	1418	1850	2400	2900	3600	4000	4600

**Class 2500** Cast Carbon Steel Check Valve

ASME B16.34,  
Pressure Seal, Swing Type Disc

Figure NO.:

S25R-PS,WCB/NO.5  
S25B-PS,WCB/NO.5  
S25J-PS,WCB/NO.5

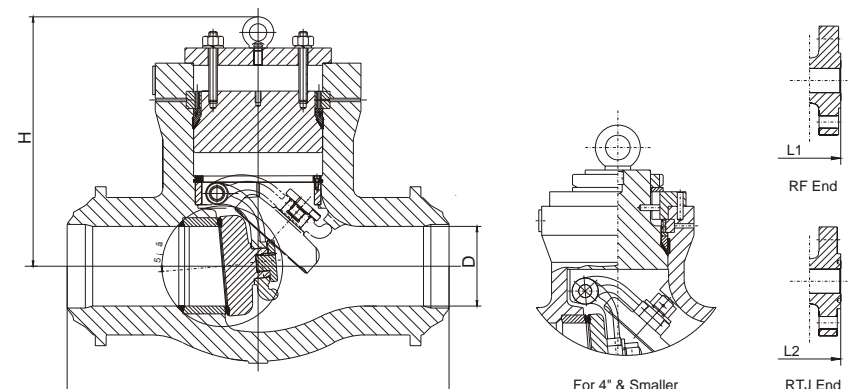

NPS	in	2"	2-1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
DN	mm	50	65	80	100	150	200	250	300	350	400	450	500	600
L (BW)	in	11	13	14.5	18	24	30	36	41	44	49	55	61	68
	mm	279	330	368	457	610	762	914	1041	1118	1245	1397	1549	1727
L1 (RF)	in	17.8	20	22.8	26.5	36	40.3	50	56	-	-	-	-	-
	mm	451	508	578	673	914	1022	1270	1422	-	-	-	-	-
L2 (RTJ)	in	17.9	20.3	23	26.9	36.5	40.9	50.9	56.9	60.88	-	-	-	-
	mm	454	514	584	683	927	1038	1292	1445	1546	-	-	-	-
H	in	9.6	10.4	10.6	12.5	17.8	22	22.7	25.8	33.88	35.38	39.38	45.25	55.13
	mm	245	264	270	318	451	559	576	656	860	899	1000	1149	1400
WT(RF)	kg	89	124	163	299	588	1071	1676	2772	3350	-	-	-	-
WT(BW)	kg	53	74	89	142	285	598	783	1512	2450	3200	4050	5000	7200